




J1587/J1708 Procon_{TB} Config Examples

J1939 Protocol with RS232 output.	P/N: PC1939MBRS2 (MODBUS)
J1939 Protocol with RS485 output.	P/N: PC1939MBRS4 (MODBUS)
J1708 Protocol with RS232 output.	P/N: PC1708MBRS2 (MODBUS)
J1708 Protocol with RS485 output.	P/N: PC1708MBRS

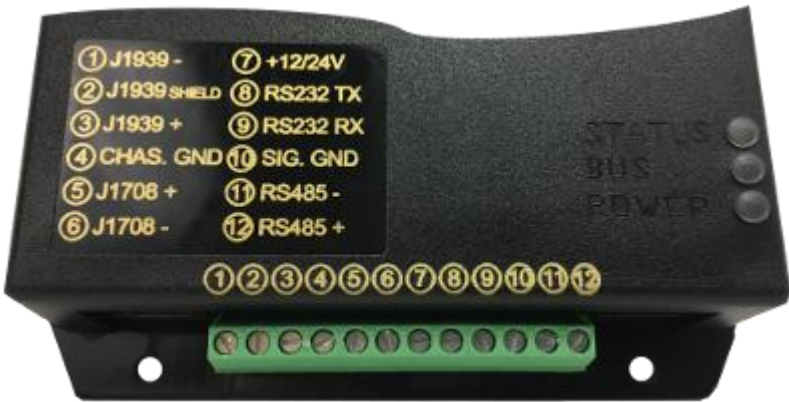

The image shows a black Procon_{TB} module with a green terminal block at the bottom. The terminal block has 12 pins, numbered 1 through 12. The labels on the module are as follows:

① J1939 -	⑦ +12/24V
② J1939 SHIELD	⑧ RS232 TX
③ J1939 +	⑨ RS232 RX
④ CHAS. GND	⑩ SIG. GND
⑤ J1708 +	⑪ RS485 -
⑥ J1708 -	⑫ RS485 +

On the right side of the module, there are three status LEDs labeled "STATUS", "BUS", and "POWER".

For other protocols please call (780) 963-8930 or Email: sales@c-a-i.net